

Schema-Related Eye Movements Support Episodic Simulation

Jordana S. Wynn¹, Ruben D.I. van Genugten¹, Signy Sheldon², Daniel L. Schacter¹

¹*Department of Psychology, Harvard University, Cambridge, USA*

²*Department of Psychology, McGill University, Montreal, Canada*

Correspondence concerning this article should be addressed to: Jordana S. Wynn,
Psychology Department, Harvard University, 33 Kirkland St., Cambridge, MA, USA, 02138,
jordanawynn@g.harvard.edu

Abstract

Recent work indicates that eye movements support the retrieval of episodic memories by reactivating the spatiotemporal context in which they were encoded. Although similar mechanisms have been thought to support simulation of future episodes, there is currently no evidence to support this proposal. In the present study, we investigated the role of eye movements in episodic simulation by comparing the gaze patterns of individual participants imagining future scene and event scenarios to across-participant gaze templates for those same scenarios, reflecting their shared features (i.e., schemas). Our results provide novel evidence that eye movements during episodic simulation in the face of distracting visual noise are (1) schema-specific and (2) predictive of simulation success. Together, these findings suggest that eye movements support episodic simulation via reinstatement of scene and event schemas, and more broadly, that interactions between the memory and oculomotor effector systems may underlie critical cognitive processes including constructive episodic simulation.

Introduction

Recall the last time you went to the beach. You might find yourself looking around as you mentally reconstruct the sights, smells, and sounds of that event. In fact, research using eye movement monitoring indicates that successful memory retrieval is accompanied by spontaneous gaze shifts reflecting spatial and temporal mnemonic content (e.g., Bochynska & Laeng, 2015; Foulsham & Kingstone, 2013; Johansson & Johansson, 2013; Olsen, Chiew, Buchsbaum, & Ryan, 2014; for review, see Wynn, Shen, & Ryan, 2019). Even when looking at a blank computer screen, eye movements during retrieval tend towards regions of the screen associated with previously relevant encoded information. This pattern of “looking at nothing” has been proposed to support memory retrieval by projecting internal representations of spatial and/or temporal relations onto the external world (Altmann, 2004; Richardson & Spivey, 2000; for review, see Ferreira, Apel, & Henderson, 2008). Extending this work, in the present study we examined how eye movements support the construction of future event simulations. Specifically, we investigated the hypothesis that eye movements support simulation via the reinstatement of mentally stored scene and event schemas.

Research over the past several decades has established a critical link between remembering the past and imagining the future. Both processes rely on *constructive episodic simulation*, the ability to reactivate and recombine spatial and temporal elements from one’s personal past (Schacter & Addis, 2007, 2020). In addition to this shared cognitive basis, both episodic remembering and future imagining recruit a similar *core network* of brain regions, including the prefrontal cortex, parahippocampal cortex, and hippocampus (Benoit & Schacter, 2015). Importantly, recent work suggests that this network, and specifically the hippocampus, is both anatomically and functionally connected to regions involved in visual imagery (Bird,

Capponi, King, Doeller, & Burgess, 2010; Hassabis, Kumaran, & Maguire, 2007; for review, see Pearson, 2019) and oculomotor control (Ryan et al., 2019; Shen, Bezgin, Selvam, McIntosh, & Ryan, 2016; for review, see Ryan, Shen, & Liu, 2020). Activity in these (memory- and imagery-related) regions has also been linked to eye-movement-based mnemonic reinstatement (Ryals, Wang, Polnaszek, & Voss, 2015; Wynn, Liu, & Ryan, 2021; see also, Bone et al., 2019), further suggesting that the neural mechanisms that support constructive episodic simulation and gaze reinstatement are tightly linked.

Recent work suggests that the ability to freely and voluntarily execute eye movements (as opposed to maintaining gaze on a static or moving stimulus) is important for successful retrieval of autobiographical memories (Lenoble, Janssen, & El Haj, 2019) and simulation of possible future events (de Vito, Buonocore, Bonnefon, & Della Sala, 2015). However, whereas gaze fixations have been positively correlated with autobiographical memory retrieval (Armson, Diamond, Levesque, Ryan, & Levine, 2019), other work indicates that higher fixation rates are negatively associated with future imagining (Sheldon, Cool, & El-Asmar, 2019). Given these discrepant findings, it remains unclear what role eye movements play in constructive episodic simulation (i.e., what accounts for the above-noted free-viewing advantage). A promising hypothesis is that eye movements facilitate the broad reactivation of spatial and temporal contextual representations from memory, facilitating the retrieval or generation of further episodic details (see Wynn et al., 2019; see also, Conti & Irish, 2021). Importantly however, such reactivation would not be evident in fixations rates, but rather in reinstated gaze patterns.

In the present study, we utilized gaze similarity analyses to probe the role of eye movements in constructive episodic simulation. Specifically, we leveraged existing data from Sheldon et al. (2019), in which participants imagined and described future scene (e.g., beach)

and event (e.g., wedding) scenarios while looking at a blank screen or Dynamic Visual Noise, to evaluate the hypothesis that eye movements support successful simulation by retrieving and reactivating contextual details from memory. To this end, we generated gaze templates for cued schemas by aggregating the eye movements of all participants imagining future scene and event scenarios. Because schemas are based on gist-like details extracted across multiple repeated experiences, they show striking consistency across individuals (for review, see Ghosh & Gilboa, 2014; Gilboa & Marlatte, 2017; see also, Baldassano, Hasson, & Norman, 2018). This shared feature space allows us to measure the degree to which a schema is reactivated as a function of the degree to which those shared features, indexed here via aggregated (across-participant) eye movements, are expressed.

Based on prior evidence of functional gaze reinstatement (i.e., gaze reinstatement that supports memory retrieval: for review, see Wynn et al., 2019), we predicted that: 1) if eye movements support the reactivation of schema-related contextual details, they should be more similar to the gaze template for the corresponding (matching) cue than to the gaze templates for the other (mismatching) cues, and 2) if schema-related eye movements support successful simulation, they should be positively correlated with objective (i.e., number of episodic details) or subjective (i.e., familiarity and pre-experiencing ratings) measures of simulation success. In line with these predictions, we provide novel evidence that eye movements during simulation (in the face of distracting visual noise) are both schema-specific and predictive of simulation success, suggesting a critical role for overt gaze shifts in constructive episodic simulation.

Methods

Participants

Participants were 40 young adults (32 female) aged 18-35 ($M = 21$, $SD = 1.4$) with normal or corrected-to-normal vision, English fluency, and no history or psychiatric or neurological disorders. Participants were recruited through the McGill University participant pool and online classified ads. All participants provided written informed consent in accordance with the McGill code of ethics. Two participants were excluded from analysis due to incomplete data collection and failure to follow instructions.

Based on significant effects in the data from Wynn, Ryan, & Buchsbaum, 2020 (match similarity > mismatch similarity, $d = .47$), power analysis (using the pwr package in R) indicated that the current sample size was sufficient to detect a reliable main effect of gaze similarity using a paired-samples t-test ($\alpha = .05$) with 80% power.

Stimuli

Stimuli consisted of 4 scene cues and 4 event cues (see Table 1) selected from a larger set of 30 cues based on ratings of scene and event representativeness, respectively (for selection criteria, see Sheldon et al., 2019). During simulation, the screen was occupied by either a grey square (control condition) or one of 6 possible Dynamic Visual Noise stimuli (visual noise condition).

Cue	Scenario
Event	A future and plausible award you will receive
Event	A future and plausible exam you will write
Event	A future and plausible wedding reception that you will attend
Event	A future and plausible holiday meal
Scene	You are standing in the aisles at a public library
Scene	You are lying on a white sand beach in a beautiful tropical bay
Scene	You are standing by a tombstone in a cemetery
Scene	You are standing by a small stream somewhere deep in a forest

Apparatus

Stimuli were presented using E-Prime experimental software on a on a 24-inch monitor (1274 x 962 pixel resolution) positioned 30 cm away from participants. Monocular eye movements were recorded using a head mounted EyeLink 1000 Plus eyetracking system at 1000 Hz sampling rate (SR Research Ltd., Mississauga, Canada) while participants were positioned in a chin rest to reduce head movements. Saccades and blinks were defined by EyeLink as saccades greater than 0.5° of visual angle and the period in which saccade signal was missing for three or more consecutive samples, respectively. All remaining samples were classified as fixations.

Procedure

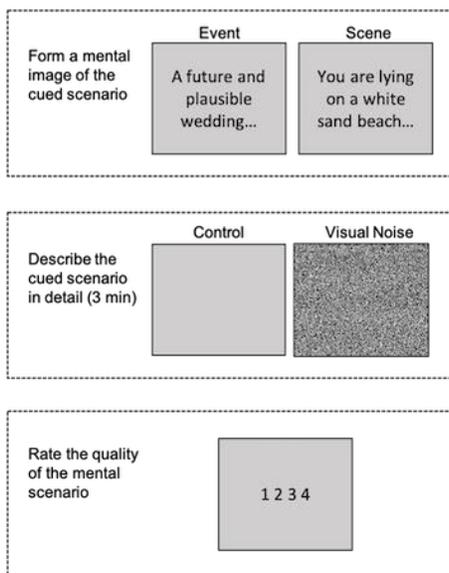


Fig 1. Visualization of the experimental procedure (adapted from Sheldon et al., 2019). Participants are cued with a scene or event schema and must then describe the cued scenario in detail while looking at a blank (control) screen or visual noise stimulus. After 3 minutes or a button press, participants must rate the subjective quality of their imagined scenario.

The current study used the same stimuli and procedure as was previously reported in Sheldon et al. (2019). Participants in the present study completed 8 trials of a simulation task, in which they were instructed to imagine and describe, in as much detail as possible, cued scene and event scenarios (Table 1, Fig 1), while maintaining their gaze on the screen. Participants

were specifically instructed to imagine a plausible future scenario and not to recall a past memory. On each trial, participants heard one of 8 scene or event cues presented auditorily over headphones. Cue order was randomized within participants, with 2 of each of the scene and event cues presented in the control condition (grey screen) and 2 presented in the visual noise condition (Dynamic Visual Noise screen). Participants were instructed to construct a scenario based on the presented cue and to press a button to indicate that they had done so (access phase). Following the button press, participants saw a grey screen or Dynamic Visual Noise and were instructed to maintain their gaze on the screen while they described the scenario in as much detail as possible for up to 3 minutes or until they were finished, as indicated by a button press (elaboration phase). If participants pressed the button prior to the 3-minute mark, they were presented with the prompt “can you think of any other details?”. After the 3 minutes elapsed, participants rated their simulation for sense of familiarity and pre-experiencing on 7 scales (see Sheldon et al., 2019). Finally, following all 8 trials, participants completed 3 neuropsychological tests; for the purposes of the present study, data from these tests was not analyzed. During the elaboration phase, simulations were audio recorded and transcribed and eye movements were recorded.

Data analysis

Description scoring

Simulations were scored using an adapted version of the Autobiographical Interview scoring procedure (Levine, Svoboda, Hay, Winocur, & Moscovitch, 2002) for imagined scenarios (for examples, see Madore, Gaesser, & Schacter, 2014; Madore, Szpunar, Addis, & Schacter, 2016; Sheldon et al., 2015). Briefly, simulations were segmented into details, which were then classified as either internal or external, reflecting episodic and non-episodic processes,

respectively. Whereas internal details are directly related to the described scenario, external details are tangential to the described scenario (e.g., commentary, semantic knowledge, etc.). For further details on description scoring, see the [Supplemental Materials](#).

Subjective ratings

Subjective ratings were reduced to 2 principal components using a principal component factor analysis with varimax rotation (see Table S1). The first component, defined here as *pre-experiencing*, included ratings for vividness, sense of presence, and spatial arrangement. The second component, defined here as *familiarity*, included ratings for scenario familiarity and reminders of past events. Scores for each component were obtained by averaging the scores from the constituent ratings. For further details regarding factor loadings and comparisons of scores, see the [Supplemental Materials](#).

Eye movement similarity analysis

Analysis of eye movement data was based on eye movements made during the elaboration phase (when participants were describing the scenario), excluding the first fixation and all fixations off screen. To quantify cue-specific viewing, we used a leave-one-subject-out (LOSO) cross validation procedure. Specifically, to investigate how well individual gaze patterns could be predicted by the group-average gaze patterns for the same cue, we correlated the fixation density maps for each cue (using the fixations of all participants) with the corresponding left out participant's density map for the same cue (match similarity), using the eyesim package (<https://github.com/bbuchsbbaum/eyesim>; Wynn et al., 2020). To rule out the possibility that similarity between participant-specific and group-average gaze patterns was driven by cue-invariant viewing biases (e.g., center bias), we additionally computed the similarity between participant-specific density maps and group-average density maps for all other cues. The

resulting scores were averaged to obtain a single mismatch similarity score. Mismatch similarity scores were subtracted from match similarity scores to obtain controlled gaze similarity scores, reflecting cue-specific viewing that is not driven by generic viewing tendencies. For further details regarding the similarity analysis, see the [Supplemental Materials](#).

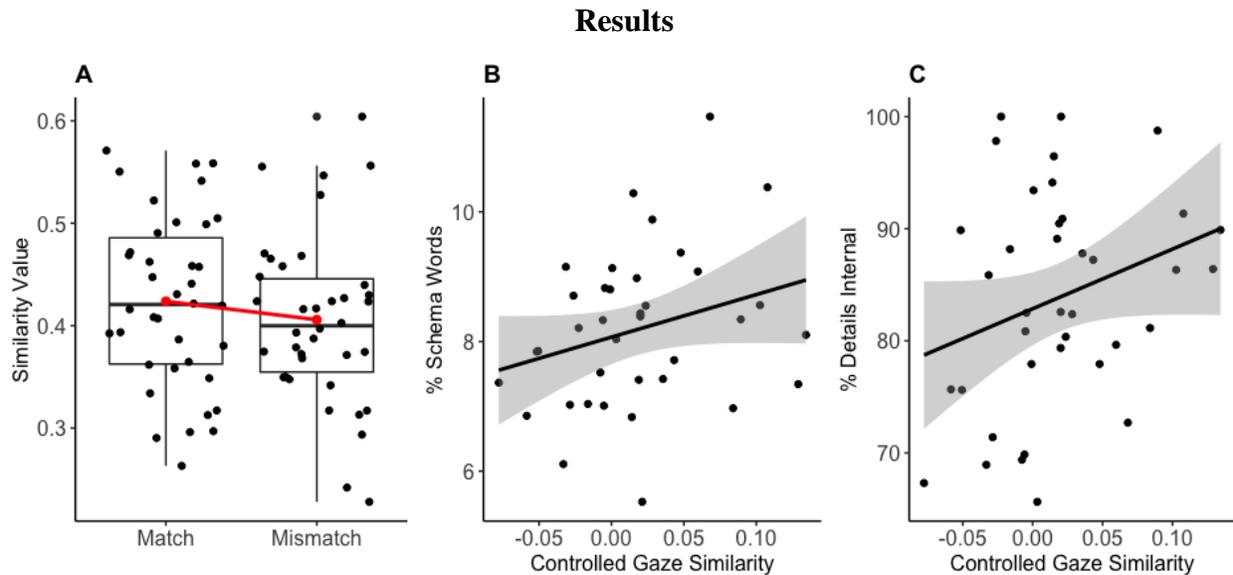


Fig 2. (A) Similarity between schema-specific gaze patterns and gaze templates for matching and mismatching schema cues. (B) Correlation between controlled gaze similarity (match – mismatch) and the proportion of total words that are classified as schematic using the natural language processing scoring approach. (C) Correlation between controlled gaze similarity (match – mismatch) and the proportion of total words that are classified as internal using the autobiographical interview scoring approach. All plots contain data from the visual noise condition only.

Eye movements during visual noise simulation are schema-specific

To investigate whether eye movements during simulation aligned with the gaze template for the corresponding schema, we ran an ANOVA with similarity value as the dependent variable, and cue (event, scene), condition (control, Dynamic Visual Noise), and similarity template (match, mismatch) as independent variables. If individual gaze patterns indeed reflect the cued schema, they should be more similar to the gaze template (i.e., group-average density

map) for the same schema than to the gaze templates for all other schemas (i.e., match similarity should be significantly greater than mismatch similarity).

Results of the ANOVA revealed a significant interaction of similarity template by condition [$F(1,37) = 4.76, p = .036, \eta_p^2 = .11$], as well as significant main effects of condition [$M(SE)_{Control} = 0.40(0.01), M(SE)_{Visual\ Noise} = 0.42(0.01); F(1,37) = 4.22, p = .047, \eta_p^2 = .10$] and cue [$M(SE)_{Event} = 0.41(0.01), M(SE)_{Scene} = 0.41(0.01); F(1,37) = 4.51, p = .040, \eta_p^2 = .11$].

Follow up paired-samples t -tests of the difference in mean match and mismatch similarity scores in each condition (control, visual noise) indicated that match similarity was significantly greater than mismatch similarity in the visual noise condition only [$t(37) = 2.17, p = .036, d = .35$, see Fig 2A], while the control condition was trending in the opposite direction [$t(37) = -2.01, p = .051, d = .33$]. Critically, these findings indicate that participant-specific eye movements during simulation in the face of visual noise reflect the specific cued schema. For all following analyses, only data from the visual noise condition were included, as these produced a significant difference between match and mismatch similarity scores in the expected direction (match > mismatch).

To further investigate whether the described eye movement measure captured the schematicity of a simulated event, we tested for a relationship between eye movements and a linguistic measure of schematicity based solely on participants' transcribed simulations. We derived this linguistic measure by counting the number of schema-relevant words in each simulation, then dividing by the total number of words in the simulation, to obtain the proportion of content that is schema-relevant. To identify schema-relevant words, we used methods from natural language processing (specifically, Global Vectors for Word Representation (GloVe), an unsupervised learning algorithm for obtaining vector representations for words; Pennington,

Socher, & Manning, 2014). For each cue word, we extracted a list of 10,000 related words based on the frequency of word co-occurrences in a corpus of webpages. This approach yielded word lists that sufficiently captured schematic (cue-related) words, while excluding non-schematic words. We scored each word in the transcribed simulations based on its match to the cue-related word list. Any word appearing in the cue-related word list received a score of 1, while all other words received a score of 0. For each simulation, we then derived the proportion of total words that were related to the cue word (% schema words). This measure was validated against two external measures of schematicity. For further details on this scoring approach, including validation procedures, see the [Supplemental Materials](#).

Prior to analysis, one participant was removed on the basis of mean % schema words >2.5 sd from the mean. A bootstrapped correlation ($n = 1000$) of mean controlled gaze similarity scores (indexed as the difference in match and mismatch similarity scores, for visual noise trials only), and mean % schema words was significant ($r = .28$, $p = .027$, 95% CI [.038, .544], see Fig 2B), indicating that participants who on average exhibited more schema-specific gaze patterns also produced a greater number of schema-related details during simulation.

Schema-specific eye movements support simulation success

To investigate whether schema-related eye movements were associated with simulation success, we ran a linear mixed effects model (LMEM) on controlled gaze similarity (match similarity- mismatch similarity for visual noise trials) with all interactions of cue, number of internal details, number of external details, pre-experiencing ratings, and familiarity ratings as predictors¹ and a random intercept for participant. We used backwards model comparison ($\alpha = .1$) to determine the best fit model (see Table 2).

¹ Cue was dummy coded as: Scene = 0, Event = 1. All other variables were z-scored.

Table 2. Controlled Gaze Similarity					
Fixed Effects					
	β	95% CI	SE	t	p
(Intercept)	.021	.001, .041	.010	2.081	.041 *
Internal Details	.022	.003, .042	.009	2.277	.024 *
Cue	-.001	-.024, .021	.011	-.094	.925
Familiarity	.011	-.001, .023	.006	1.845	.067
Internal Details X Cue	-.028	-.051, -.004	.012	-2.350	.020 *
Total Observations = 149					
	Variance		SD		
Random Effect for Participant (Intercept)	.002		.039		
Model equation: Controlled Gaze Similarity ~ Internal Details X Cue + Familiarity + (1 Participant)					

Results of the best fit model of controlled gaze similarity (Table 2) revealed a significant effect of internal details for scenes, and this effect was significantly attenuated for events. Consistent with our predictions, this finding indicates that successful simulations, indexed by a high number of internal details, are characterized by a high degree of consistency with the gaze template for the corresponding scene schema. The model also revealed a marginally significant effect of familiarity, with more familiar cues producing greater eye movement similarity. Notably, both external details and pre-experiencing ratings were omitted from the model, indicating that they were not significantly predictive of gaze similarity. Although we did not observe significant schema-related eye movements in the control condition, a LMEM on gaze similarity for control trials (see Table S2) revealed a significant positive effect of external details and a significant negative effect of familiarity on gaze similarity.

Table 3. Internal Details						
Fixed Effects						
	β	95% CI	SE	t	p	
(Intercept)	-.089	-.335, .156	.122	-.732	.468	
Controlled Gaze Similarity	.178	.054, .302	.063	2.839	.005 **	
Fixation Rate	-.315	-.500, -.126	.092	-3.415	<.001 ***	
Total Observations = 149						
	Variance		SD			
Random Effect for Participant (Intercept)	.488		.698			
Model equation: Internal Details ~ Controlled Gaze Similarity + Fixation Rate + (1 Participant)						

Given that Sheldon et al. (2019) previously observed a significant negative effect of fixation rate on internal detail generation, we ran an additional model on the number of internal details (for external details, see Table S3) with both fixation rate and controlled gaze similarity as predictors (Table 3). Results of the model revealed significant and opposing effects of both gaze similarity and fixation rate, neither of which was significantly predictive of external details (see Table S3). Together, these findings indicate that whereas a greater rate of fixations is related to a reduced number of internal details generated, similarity of those fixations to the cued template is related to a greater number of internal details generated.

Finally, to investigate whether the effect of gaze similarity on simulation success extended across participants, we correlated mean controlled gaze similarity scores with the mean proportion of total details that were scored as internal (as opposed to external). A bootstrapped correlation ($n = 1000$) of mean controlled gaze similarity scores and mean % internal details was significant ($r = .28$, 95% CI [.018, .526], $p = .041$, see Fig 2C), indicating that participants who on average exhibited more schema-specific gaze patterns also produced a greater number of internal details and a lower number of external details during simulation.

Discussion

Research using eye movement monitoring has provided critical evidence that eye movements play an active and functional role in memory retrieval (for review, see Wynn et al., 2019). However, whereas the relationship between eye movements and episodic memory has received significant attention and study, the role of overt gaze shifts in episodic simulation remains unclear. Recent work suggests that eye movements play an important role in imagining future events, such that restricting them (e.g., to a static or moving fixation cross) impairs simulation (de Vito et al., 2015; see also, de Vito, Buonocore, Bonnefon, & Della Sala, 2014). However, executing more gaze fixations disrupts future simulation rather than supports it (Sheldon et al., 2019). Given that future simulation relies on many of the same cognitive and neural mechanisms that support episodic memory (Benoit & Schacter, 2015; Schacter & Addis, 2007, 2020), we proposed that eye movements during simulation would serve a similar role as they do during episodic memory- that is, facilitating the retrieval of stored visuospatial contextual (in this case, schematic) details. Accordingly, in the present study, we applied gaze similarity and linguistic analyses to eye movement and narrative data from Sheldon et al. (2019), in which participants imagined and described plausible future scene and event scenarios, to test the hypothesis that overt gaze shifts support episodic simulation by reactivating relevant schematic details from memory.

Lending support to our prediction, our results indicated that when imagining future scenes and events, participants spontaneously moved their eyes to screen regions associated with the cued schema. Specifically, we found that in the visual noise condition, eye movements during simulation were more similar to the gaze template for the corresponding schema cue (generated from the eye movements of all other participants simulating the same scenario) than

to the gaze templates for the other schema cues. This finding is consistent with previous work showing modulation of eye movements by prior knowledge (e.g., schemas: Võ & Wolfe, 2013; Wynn, Ryan, & Moscovitch, 2019), and with research indicating that gaze similarity supports memory retrieval, particularly when cognitive load exceeds cognitive resources (e.g., by virtue of age, Wynn et al., 2018; or task difficulty, Wynn et al., 2020; for review, see Wynn et al., 2019). Thus, when visual noise rendered simulation more difficult (as indicated by a significant reduction in internal details relative to the control condition; see Sheldon et al., 2019), presumably by interfering with visual imagery (see Anderson, Dewhurst, & Dean, 2017), participants may have executed overt gaze shifts reflecting the cued scenario in an effort to retrieve and visualize schema-specific contextual details.

To further validate gaze similarity as an index of the schematicity of a simulated scenario, we developed a novel linguistic analysis to quantify the number of schema-specific details present in narrative data. Leveraging tools from natural language processing, we generated lexicons for each of the cue words and used these to identify schema-related words in described simulations. Results of the linguistic analysis revealed that the proportion of total words that were characterized as schematic was significantly correlated with gaze similarity, suggesting that eye movements capture the schematic content of simulations similarly to linguistic details. While further work will be required to fully probe the manner in which schematic and other mnemonic details are expressed via eye movements and natural language, these findings provide initial evidence that these modalities may be more related than previously thought (see also, Ferreira et al., 2008).

The described results support our hypothesis that eye movements during future simulation facilitate the reinstatement of schema-specific visuospatial contextual features.

Importantly, however, a central feature of *functional* gaze reinstatement is that it is related to mnemonic performance (see Wynn et al., 2019). Accordingly, we proposed that processes central to constructive episodic simulation (e.g., retrieval) would not only be evident in the gaze patterns of participants during elaboration, but that such patterns would also be predictive of simulation success. In line with this prediction, we found that gaze similarity (to the corresponding schema gaze template) during visual noise simulation was positively correlated with the proportion of internal details generated, an objective measure of simulation success. This finding is consistent with recent work indicating that during autobiographical memory retrieval, activity in brain regions associated with stored knowledge networks or *schemas* precedes activity in the hippocampus, and further suggests that schemas may provide a foundation upon which episodic memories and simulations are (re)constructed (McCormick, Barry, Jafarian, Barnes, & Maguire, 2020). Moreover, when modeled together, gaze similarity was positively predictive of internal details, while gaze fixation rate was negatively predictive. Thus, while a greater rate of fixations might be indicative of a failed mental search (see Sheldon et al., 2019), schema-specific fixations appear to reflect and support active retrieval and construction processes (i.e., the generation of a schema). In other words, simulation success is determined not by how much we look, but rather by where we look.

In sum, the present results indicate that eye movements during episodic simulation in the face of distracting visual noise are both schema-specific and predictive of successful simulation. Considered together, these findings suggest that eye movements support the retrieval and reactivation of relevant (i.e., schematic) contextual details from memory by shifting attention to meaningful regions of the screen (i.e., regions corresponding to salient imagined content), and in doing so, provide a foundation on which to generate and construct an imagined scenario (see

also, Hassabis & Maguire, 2007, 2009; McCormick et al., 2020). This interpretation is consistent with the proposed role of functional gaze reinstatement during episodic memory retrieval (for review, see Wynn et al., 2019) and simulation (see Conti & Irish, 2021), and provides a potential explanation for the detrimental effects of restricted viewing on autobiographical memory retrieval (Lenoble et al., 2019) and future imagining. (de Vito et al., 2015). Extending this work, the present results suggest that constructive memory is likely supported by complex interactions between processes involved in gaze control, stored knowledge, visual imagery, and memory retrieval (see also, Conti and Irish, 2021). Future work should continue to build on this work by exploring the ways in which eye movements (and other effector systems) may support constructive episodic simulation across various tasks by reactivating stored spatiotemporal contextual information.

Acknowledgements

The authors wish to thank Kelly Cool and Nadim El-Asmar for assistance with data collection and Tarek Amer for helpful comments on the manuscript. This work was supported by an NSERC Discovery Grant (Grant Number: RGPIN-04241) awarded to Signy Sheldon and a National Institute on Aging Grant (Grant Number: R01 AG008441) awarded to Daniel Schacter.

Open Practices Statement

The data reported here can be made available upon request. This experiment was not preregistered.

References

- Addis, D. R., Wong, A. T., & Schacter, D. L. (2007). Remembering the past and imagining the future: common and distinct neural substrates during event construction and elaboration. *Neuropsychologia*, *45*(7), 1363–1377.
<https://doi.org/10.1016/j.neuropsychologia.2006.10.016>
- Altmann, G. T. M. (2004). Language-mediated eye movements in the absence of a visual world: The “blank screen paradigm.” *Cognition*, *93*(2), 79–87.
<https://doi.org/10.1016/j.cognition.2004.02.005>
- Anderson, R. J., Dewhurst, S. A., & Dean, G. M. (2017). Direct and generative retrieval of autobiographical memories: The roles of visual imagery and executive processes. *Consciousness and Cognition*, *49*, 163–171. doi:10.1016/j.concog.2017.02.010
- Armson, M. J., Diamond, N. B., Levesque, L., Ryan, J. D., & Levine, B. (2019). Vividness of recollection is supported by eye movements in individuals with high, but not low trait autobiographical memory. *Memory*, *206*(March 2020), 1–37.
<https://doi.org/10.1016/j.cognition.2020.104487>
- Baldassano, C., Hasson, U., & Norman, K. A. (2018). Representation of real-world event schemas during narrative perception. *Journal of Neuroscience*, *38*(45), 9689–9699.
<https://doi.org/10.1523/JNEUROSCI.0251-18.2018>
- Benoit, R. G., & Schacter, D. L. (2015). Specifying the core network supporting episodic simulation and episodic memory by activation likelihood estimation. *Neuropsychologia*, *75*(3), 450–457. <https://doi.org/10.1016/j.neuropsychologia.2015.06.034>
- Bird, C. M., Capponi, C., King, J. A., Doeller, C. F. & Burgess, N. (2010). Establishing the boundaries: the hippocampal contribution to imagining scenes. *Journal of Neuroscience*,

30, 11688–11695. <https://doi-org.ezp-prod1.hul.harvard.edu/10.1523/JNEUROSCI.0723-10.2010>

Bochynska, A., & Laeng, B. (2015). Tracking down the path of memory: eye scanpaths facilitate retrieval of visuospatial information. *Cognitive Processing, 16*(1), 159–163.

<https://doi.org/10.1007/s10339-015-0690-0>

Bone, M. B., St-Laurent, M., Dang, C., McQuiggan, D. A., Ryan, J. D., & Buchsbaum, B. R. (2019). Eye movement reinstatement and neural reactivation during mental imagery. *Cerebral Cortex, 29*(3), 1075–1089. <https://doi.org/10.1093/cercor/bhy014>

Conti, F., & Irish, M. (2021). Harnessing visual imagery and oculomotor behaviour to understand prospection. *Trends in Cognitive Sciences, 25*(4), 272-283.

<https://doi.org/10.1016/j.tics.2021.01.009>

de Vito, S., Buonocore, A., Bonnefon, J. F., & Della Sala, S. (2014). Eye movements disrupt spatial but not visual mental imagery. *Cognitive Processing, 15*(4), 543–549.

<https://doi.org/10.1007/s10339-014-0617-1>

de Vito, S., Buonocore, A., Bonnefon, J. F., & Della Sala, S. (2015). Eye movements disrupt episodic future thinking. *Memory, 23*(6), 796–805.

<https://doi.org/10.1080/09658211.2014.927888>

Ferreira, F., Apel, J., & Henderson, J. M. (2008). Taking a new look at looking at nothing.

Trends in Cognitive Sciences, 12(11), 405–410. <https://doi.org/10.1016/j.tics.2008.07.007>

Foulsham, T., & Kingstone, A. (2013). Fixation-dependent memory for natural scenes: an experimental test of scanpath theory. *Journal of Experimental Psychology. General, 142*(1), 41–56. <https://doi.org/10.1037/a0028227>

<https://doi.org/10.1037/a0028227>

Ghosh, V. E., & Gilboa, A. (2014). What is a memory schema? A historical perspective on

current neuroscience literature. *Neuropsychologia*, 53(1), 104–114.

<https://doi.org/10.1016/j.neuropsychologia.2013.11.010>

Gilboa, A., & Marlatte, H. (2017). Neurobiology of schemas and schema-mediated memory.

Trends in Cognitive Sciences, 21(8), 618–631. <https://doi.org/10.1016/j.tics.2017.04.013>

Hassabis, D., Kumaran, D., & Maguire, E. A. (2007). Using imagination to understand the neural

basis of episodic memory. *The Journal of Neuroscience : The Official Journal of the Society for Neuroscience*, 27(52), 14365–14374.

<https://doi.org/10.1523/JNEUROSCI.4549-07.2007>

Hassabis, D., & Maguire, E. A. (2007). Deconstructing episodic memory with construction.

Trends in Cognitive Sciences, 11(7), 299–306. <https://doi.org/10.1016/j.tics.2007.05.001>

Hassabis, D., & Maguire, E. A. (2009). The construction system of the brain. *Philosophical*

Transactions of the Royal Society of London. Series B, Biological Sciences, 364(1521), 1263–1271. <https://doi.org/10.1098/rstb.2008.0296>

Johansson, R., & Johansson, M. (2013). Look here, eye movements play a functional role in memory retrieval. *Psychological Science*, 25(1), 236–242.

<https://doi.org/10.1177/0956797613498260>

Lenoble, Q., Janssen, S. M. J., & El Haj, M. (2019). Don't stare, unless you don't want to

remember: Maintaining fixation compromises autobiographical memory retrieval. *Memory*, 27(2), 231–238. <https://doi.org/10.1080/09658211.2018.1501068>

Levine, B., Svoboda, E., Hay, J. F., Winocur, G., & Moscovitch, M. (2002). Aging and

autobiographical memory: Dissociating episodic from semantic retrieval. *Psychology and Aging*, 17(4), 677–689. <https://doi.org/10.1037//0882-7974.17.4.677>

Madore, K. P., Gaesser, B., & Schacter, D. L. (2014). Constructive episodic simulation:

- Dissociable effects of a specificity induction on remembering, imagining, and describing in young and older adults. *Journal of Experimental Psychology: Learning, Memory, and Cognition*, *40*(3), 609–622. doi:10.1037/a0034885
- Madore, K. P., Szpunar, K. K., Addis, D. R., & Schacter, D. L. (2016). Episodic specificity induction impacts activity in a core brain network during construction of imagined future experiences. *Proceedings of the National Academy of Sciences*, *113*(38), 10696–10701. doi:10.1073/pnas.1612278113
- McCormick, C., Barry, D. N., Jafarian, A., Barnes, G. R., & Maguire, E. A. (2020). VmPFC drives hippocampal processing during autobiographical memory recall regardless of remoteness. *Cerebral Cortex*, *30*(11), 5972–5987. <https://doi.org/10.1093/cercor/bhaa172>
- Olsen, R. K., Chiew, M., Buchsbaum, B. R., & Ryan, J. D. (2014). The relationship between delay period eye movements and visuospatial memory. *Journal of Vision*, *14*(1), 8–8. <https://doi.org/10.1167/14.1.8>
- Pearson, J. (2019). The human imagination: the cognitive neuroscience of visual mental imagery. *Nature Reviews Neuroscience*, *20*(10), 624–634. <https://doi.org/10.1038/s41583-019-0202-9>
- Pennington, J., Socher, R., & Manning, C D. (2014). Glove: Global vectors for word representation. *Proceedings of the Empirical Methods in Natural Language Processing (EMNLP)*, 1532–1543.
- Richardson, D. C., & Spivey, M. J. (2000). Representation, space and Hollywood Squares: Looking at things that aren't there anymore. *Cognition*, *76*(3), 269–295. [https://doi.org/10.1016/S0010-0277\(00\)00084-6](https://doi.org/10.1016/S0010-0277(00)00084-6)
- Ryals, A. J., Wang, J. X., Polnaszek, K. L., & Voss, J. L. (2015). Hippocampal contribution to

implicit configuration memory expressed via eye movements during scene exploration.

Hippocampus, 25(9), 1028–1041. <https://doi.org/10.1002/hipo.22425>

Ryan, J. D., & Shen, K. (2020). The eyes are a window into memory. *Current Opinion in*

Behavioral Sciences, 32, 1–6. <https://doi.org/10.1016/j.cobeha.2019.12.014>

Ryan, J. D., Shen, K., Kacollja, A., Tian, H., Griffiths, J., Bezgin, G., & McIntosh, A. R. (2019).

Modeling the influence of the hippocampal memory system on the oculomotor system.

Network Neuroscience, 1–17. https://doi.org/10.1162/netn_a_00120

Ryan, J. D., Shen, K., & Liu, Z. (2020). The intersection between the oculomotor and

hippocampal memory systems: empirical developments and clinical implications. *Annals of the New York Academy of Sciences*, 1464(1), 115–141.

<https://doi.org/10.1111/nyas.14256>

Schacter, D. L., & Addis, D. R. (2007). The cognitive neuroscience of constructive memory:

Remembering the past and imagining the future. *Philosophical Transactions of the Royal Society B: Biological Sciences*, 362(1481), 773–786.

<https://doi.org/10.1098/rstb.2007.2087>

Schacter, D. L., & Addis, D. R. (2020). Memory and imagination: Perspectives on constructive

episodic simulation. A. Abraham (Ed.) *The Cambridge Handbook of the Neuroscience of Imagination*. Cambridge University Press.

Sheldon, S., Cool, K., & El-Asmar, N. (2019). The processes involved in mentally constructing

event- and scene-based autobiographical representations. *Journal of Cognitive Psychology*, 31(3), 261–275. <https://doi.org/10.1080/20445911.2019.1614004>

Sheldon, S., Vandermorris, S., Al-Haj, M., Cohen, S., Winocur, G., & Moscovitch, M. (2015).

Ill-defined problem solving in amnesic mild cognitive impairment: Linking episodic

- memory to effective solution generation. *Neuropsychologia*, 68, 168–175. doi:10.1016/j.neuropsychologia.2015.01.005
- Shen, K., Bezgin, G., Selvam, R., McIntosh, A. R., & Ryan, J. D. (2016). An anatomical interface between memory and oculomotor systems. *Journal of Cognitive Neuroscience*, 28(11), 1772–1783. https://doi.org/10.1162/jocn_a_01007
- Võ, M. L.-H., & Wolfe, J. M. (2013). The interplay of episodic and semantic memory in guiding repeated search in scenes. *Cognition*, 126(2), 198–212. <https://doi.org/10.1016/j.cognition.2012.09.017>
- Wynn, J. S., Liu, Z.-X., & Ryan, J. D. (2021). Neural correlated of subsequent memory-related gaze reinstatement. *BioRxiv*, 0–40. <https://doi.org/https://doi.org/10.1101/2021.02.23.432536>
- Wynn, J. S., Olsen, R. K., Binns, M. A., Buchsbaum, B. R., & Ryan, J. D. (2018). Fixation reinstatement supports visuospatial memory in older adults. *Journal of Experimental Psychology: Human Perception and Performance*, 44(7), 1119–1127. <https://doi.org/10.1037/xhp0000522>
- Wynn, J. S., Ryan, J. D., & Buchsbaum, B. R. (2020). Eye movements support behavioral pattern completion. *Proceedings of the National Academy of Sciences of the United States of America*, 117(11), 6246–6254. <https://doi.org/10.1073/pnas.1917586117>
- Wynn, J. S., Ryan, J. D., & Moscovitch, M. (2019). Effects of prior knowledge on active vision and memory in younger and older adults. *Journal of Experimental Psychology: General*. <https://doi.org/10.1037/xge0000657>
- Wynn, J. S., Shen, K., & Ryan, J. D. (2019). Eye movements actively reinstate spatiotemporal mnemonic content. *Vision*, 3(2), 21. <https://doi.org/10.3390/vision3020021>